

DATA SHEET

MX120A DUAL CHANNEL AUDIO MIXER "Phantom" or 12Vdc Powered

Recreational Facilities
Transportation Terminals
Convention Centers
Correctional Facilities
Warehouse/Factories
Community Halls
Gymnasiums
Sports Arenas
Shopping Malls
Super Stores
Restaurants
Theatres
Schools
Churches

PHANTOM POWER OR 12 Vdc POWERING CAPABILITY

The KDM MX120A can be installed utilizing standard microphone cable (2-wire with shield) when used with KDM Interconnect modules. This permits an MX120A to be installed in an existing microphone location utilizing the existing microphone cable. The KDM MX120A can also be powered via a 12 Vdc A.C. Adapter.

LOW IMPEDANCE MICROPHONE AND AUXILIARY (MUSIC) INPUTS

The KDM MX120A has two separate inputs channels with individual volume controls per channel. The MX120A can be used for either Microphone or Auxiliary operation (Tape, Compact Disc, Tuner, etc.).

UP TO 6 CHANNEL MIXER CONFIGURATION

Up to three KDM MX120A's can be connected together (daisy chained) to form a 6 Channel mixer all powered via "Phantom Power" or a single 12 Vdc A.C. Adapter. The KDM MX120A's can be located at a distance of up to 100 feet apart. This permits 3 Dual Channel Mixers to be installed at different locations with only one cable wired back to the main system.

INTERNAL PROGRAMMING VIA DIP SWITCH & TRIMMER SETTINGS

Permits gain, power requirements and configuration to accommodate the installation requirements. For example: Maximum gain via internal trimmer to protect the sound system from being over driven, Phantom Power (via KDM Modules) or 12 Vdc power source, Single or multiple mixer format.

BUILT IN VOICE ENHANCE CIRCUITRY TO INCREASE INTELLIGIBILITY

The microphone preamp circuit has a built-in speech enhance circuit. This speech enhance circuit reduces the low frequencies created by the human voice and hence increases intelligibility.

OPTIONAL VANDAL RESISTANT CASE WITH LOCK AND COVER

Two types of vandal resistant cases are available as options to the MX120A. These cases are painted with a low sheen black splatter finish and manufactured from 18 gauge steel, complete with lock and cover. Option 01 - Surface Mount, and Option 02 - Flush Mount

Technical Specifications



MX120A



MX120A with OPT 01
Surface Mount
Vandal Case

Gain:	52 dB \pm 1.0 dB / 2.5 mV to 1.0 V.
Response:	\pm 1 dB 1 kHz to 10 kHz, -6 dB at 100 Hz (Voice Enhance)
Noise:	Greater than 66 dB S/N (Volume control at maximum Clock Wise Rotational Position). Greater than 73 dB S/N (Volume control at 12:00 O'Clock Rotational Position).
Distortion:	Less than 0.5% T.H.D. at 1.0 V
Input Impedance:	Greater than 2 k Ω low Z mics, (50 Ω to 600 Ω)
Gain:	20 dB \pm 1.0 dB Variable via Internal Trimmer Adjustment.
Response:	Maximum: 12 dB \pm 1.0 dB / 250 mV to 1.0 V (Trimmer at maximum clockwise rotation). Minimum: - 8dB \pm 1.0 dB / 2.5 V to 1.0 V. (Trimmer at maximum counter clockwise rotation).
Noise:	\pm 1 dB 50 Hz to 15 kHz Greater than 73 dB S/N Less than 0.5% T.H.D. at 1.0 V
Distortion:	\pm 1 dB 50 Hz to 15 kHz Greater than 73 dB S/N Less than 0.5% T.H.D. at 1.0 V
Input Impedance:	Greater than 10 k Ω
Output Impedance:	Designed to operate into 600 Ω Balanced/Unbalanced.
Temperature Range:	-20 $^{\circ}$ C to 55 $^{\circ}$ C
Power Required:	Phantom power via KDM IA330A 18 Vdc / 35 mA Local Power Via AC Adapter 12 Vdc / 30 mA

Octasound Speakers and Sound System Modules are manufactured by the award winning company KDM Electronics Inc. With over 25 years of experience, KDM can design a turn-key sound system to meet or exceed your sound requirements.

Octasound®
S O U N D A B O V E A L L



by KDM Electronics

MX120A DUAL CHANNEL REMOTE MIXER

Physical Specifications

MP200A


Width: 2.75" (7.0 cm)
Height: 4.50" (1.4 cm)
Depth: 2.125" (5.4 cm)
Weight: 6.5 oz (.20 kg)

OPTION 01

Width: 4.00" (6.32 cm)
Height: 6.25" (3.8 cm)
Depth: 4.0" (2.6 cm)
Weight: 2 lbs 1.5 oz (.95 kg)

OPTION 02

Width: 6.00" (3.2 cm)
Height: 8.25" (4.1 cm)
Depth: 4.00" (.65 cm)
Weight: 2 lbs 8.0 oz (1.15 kg)

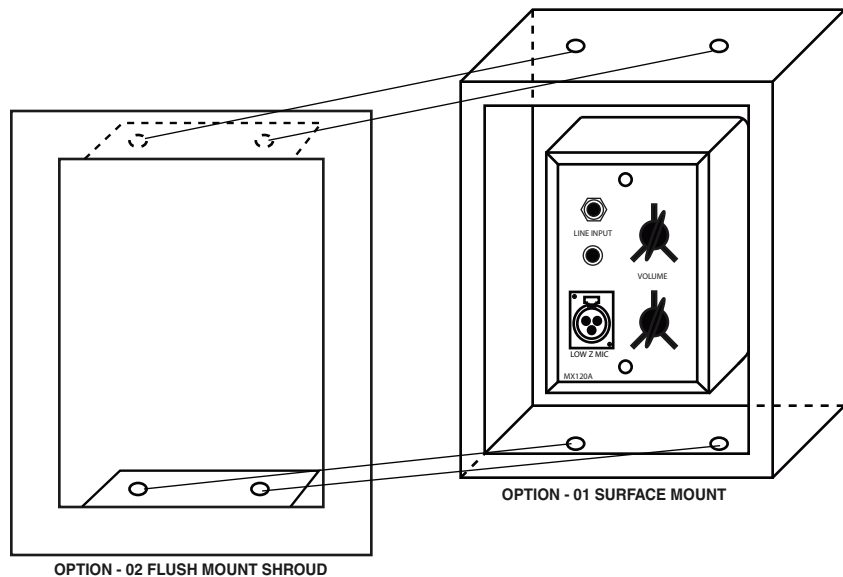

Architects and Engineers Specifications

The mixer shall be a dual channel input remote unit with individual volume controls per channel. This mixer shall be designed for low impedance microphones, standard Tape, Compact Disc, and Auxiliary inputs. The microphone input shall be via a Neutrik NC3FD connector or equivalent and the Auxiliary inputs shall be dual RCA phono connectors or equivalent. The gain of the microphone and auxiliary inputs shall be the required amount to amplify the input signal level to 1.0 volts (+2 dBm) respectively. The auxiliary input shall have an internal trimmer to set the auxiliary gain to the desired maximum that will avoid over driving the sound system. The microphone preamplifier shall have a speech enhance circuit that provides a sharp low frequency cut of greater than 6 dB at 100 Hz. The overall signal to noise ratio for the microphone channel shall be 66 dB and the auxiliary channel 73 dB minimum. Distortion shall not exceed 0.5% T.H.D. at 1.0 volts (+ 2 dBm) output. Three mixers shall be capable of being interconnected together to form a six channel mixer powered from one phantom power source and/or 12 Vdc A.C. Adapter. The mixer shall be capable of operating over a temperature range of -20 °C to 55 °C. Mechanically, this mixer shall mount directly into a standard electrical utility box type 1110, 2020 or equivalent.

This mixer shall be phantom powered via a standard two wire shielded microphone cable. The output signal must be balanced audio circuit of 1.0 Volts (+2 dBm), 600 Ohms \pm 10%, and be carried over the same cable that powers the mixer. This mixer shall be a KDM Electronics Incorporated Model MX120A, and shall provide optionally, surface mount (Option - 01), and flush mount (Option-02), vandal resistant cases complete with lock and cover. These cases shall be painted with a low sheen flat black splatter finish, and be manufactured from 18 gauge steel.

This mixer shall be KDM Electronics Incorporated Model MX120A.

Ordering Information

MX120A - Dual Source Remote Audio Mixer.

OPT 01 MX120A - Surface Mount Vandal Case.

OPT 02 MX120A - Flush Mount Vandal Case.

PS120A - 12 Volts D.C./500ma AC Adapter to power the MX120A.



KDM Electronics Inc.
931 Progress Avenue, Unit #12
Toronto, Ontario
Canada, M1G 3V5

Tel: (416) 439-7158
Toll Free: 1-800-567-6282
Fax: (416) 439-7232
Web Site: www.octasound.com
E-Mail: kdm@octasound.com