



DATA SHEET

SMLV-1 VANDAL CASE

Features:

- Provides 1.35" of recess for low voltage devices
- Protects low voltage devices/controllers from impacts
- Invisible mounting hardware
- Secure optional lockable door (SMLV-1-LD)
- Flush mountable with added FA-1 flange adapter
- 3 Knockouts for 1/2" Conduit (Top, Bottom, and Back)
- Compatible with RAMX2, RABX2, RAAX2, RUSB2 Octasound Module
- Four rear mounting holes, mounting screws not included
- 16 Gauge Steel, black powder epoxy finish
- Mounts onto countertops or wall
- Recess option with added FA-1 Flange

Ordering Info:

SMLV-1 - Surface Mount Low Voltage Vandal Case Single Gang

SMLV-1-LD - Add Locking Door

FA-1 - Single gang flange adapter to convert to flush mount configuration.

A & E Specifications:

Vandal case shall be KDM part # _____. The case shall be fabricated from 11 guage steel and have a black powder epoxy finish. The case shall be 4" x 5.75" x 3.15". The case shall provide top, bottom, and rear knockouts for 1/2" conduit.




SMLV-1
RAMX2 remote mixer installed



SMLV-1-LD
Shown with RAAX2-02 remote amplifier installed



SMLV-1 with FA-1 Flange Adapter
RAA2-01 Remote Amplifier with rear volume controls installed

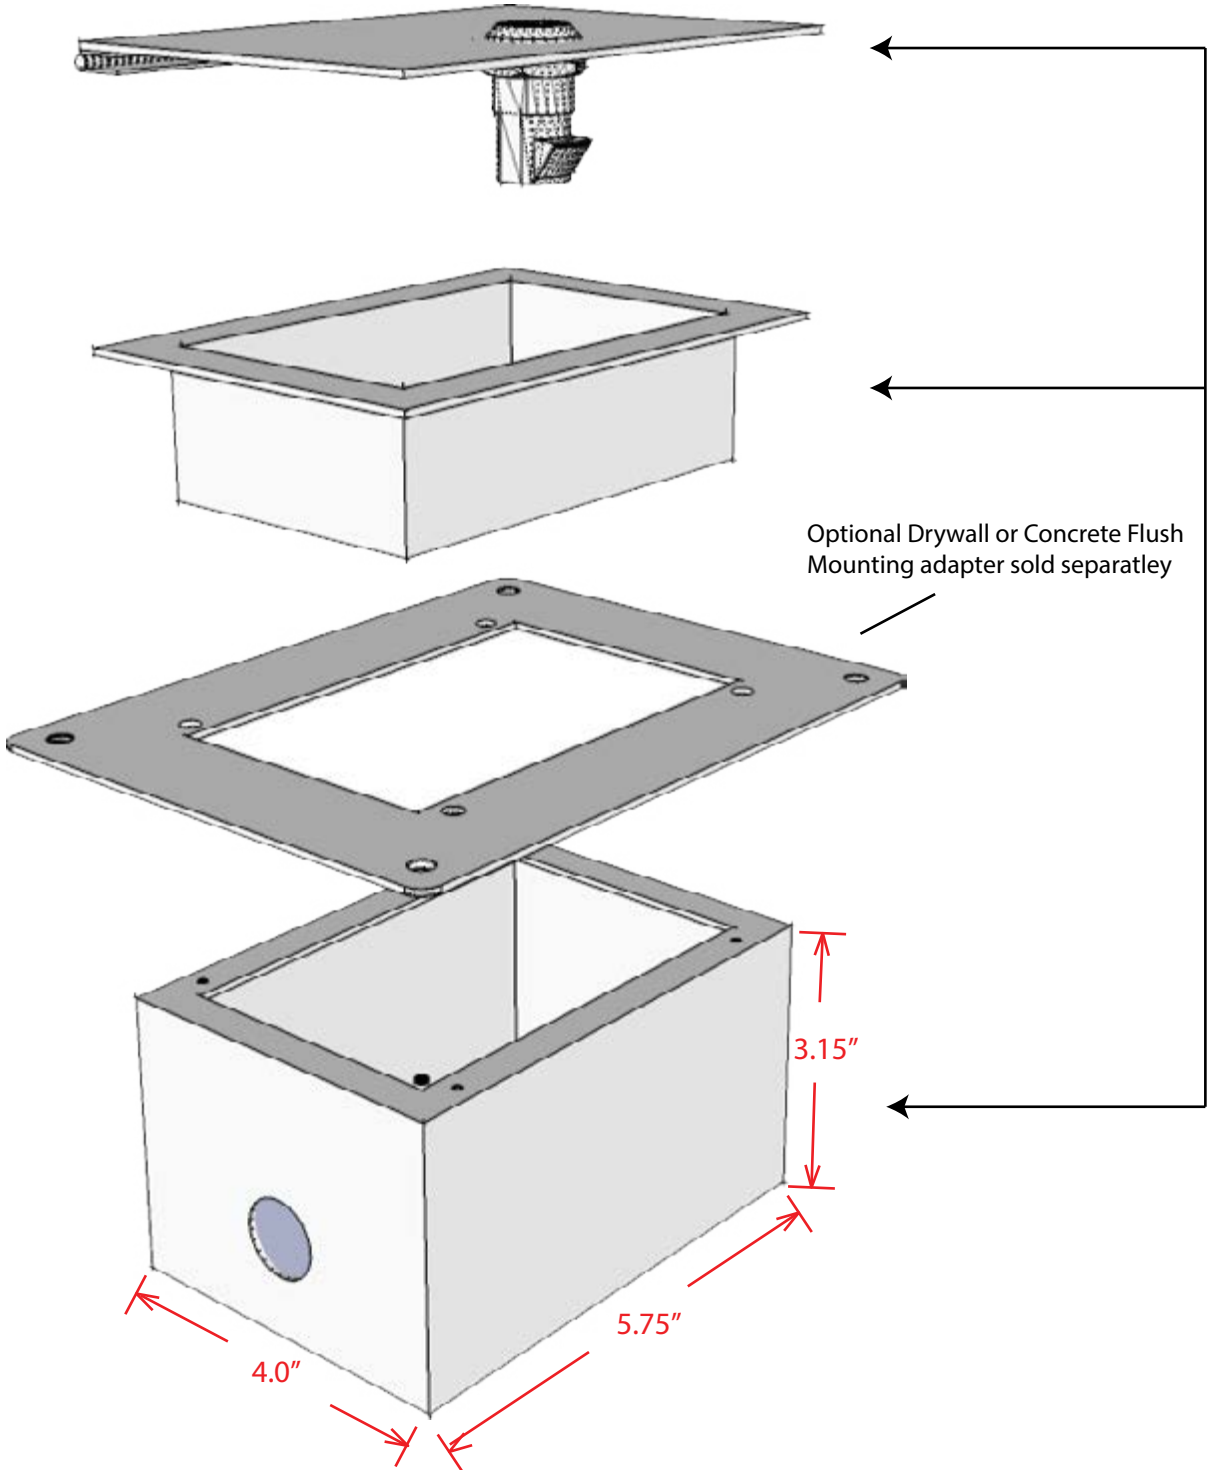

SMLV-1-LD
Surface Mount Low Voltage
Single Gang Vandal Case
With Locking Door

SMLV-1
Surface Mount Low Voltage
Single Gang Vandal Case