


TX16A

16, 8, 4, Watt / 70 Volt Transformer

1. Mount transformer using the #10 x 1/2" screws provided.
2. Connect 8 OHM **Secondary** wires from the transformer to the speakers terminals. + (**RD**) and - (**BK**).
3. Connect 70 Volt speaker cable to 70 Volt **Primary** wires on the transformer. Connect the **Common** wire **Negative** to **White (WH)** on the primary, and the **Signal** wire **Positive** to the required tap on the transformer.

16 Watts = Green (GN)
8 Watts = Blue (BL)
4 Watts = Gray (GY)
Common = White (WH)

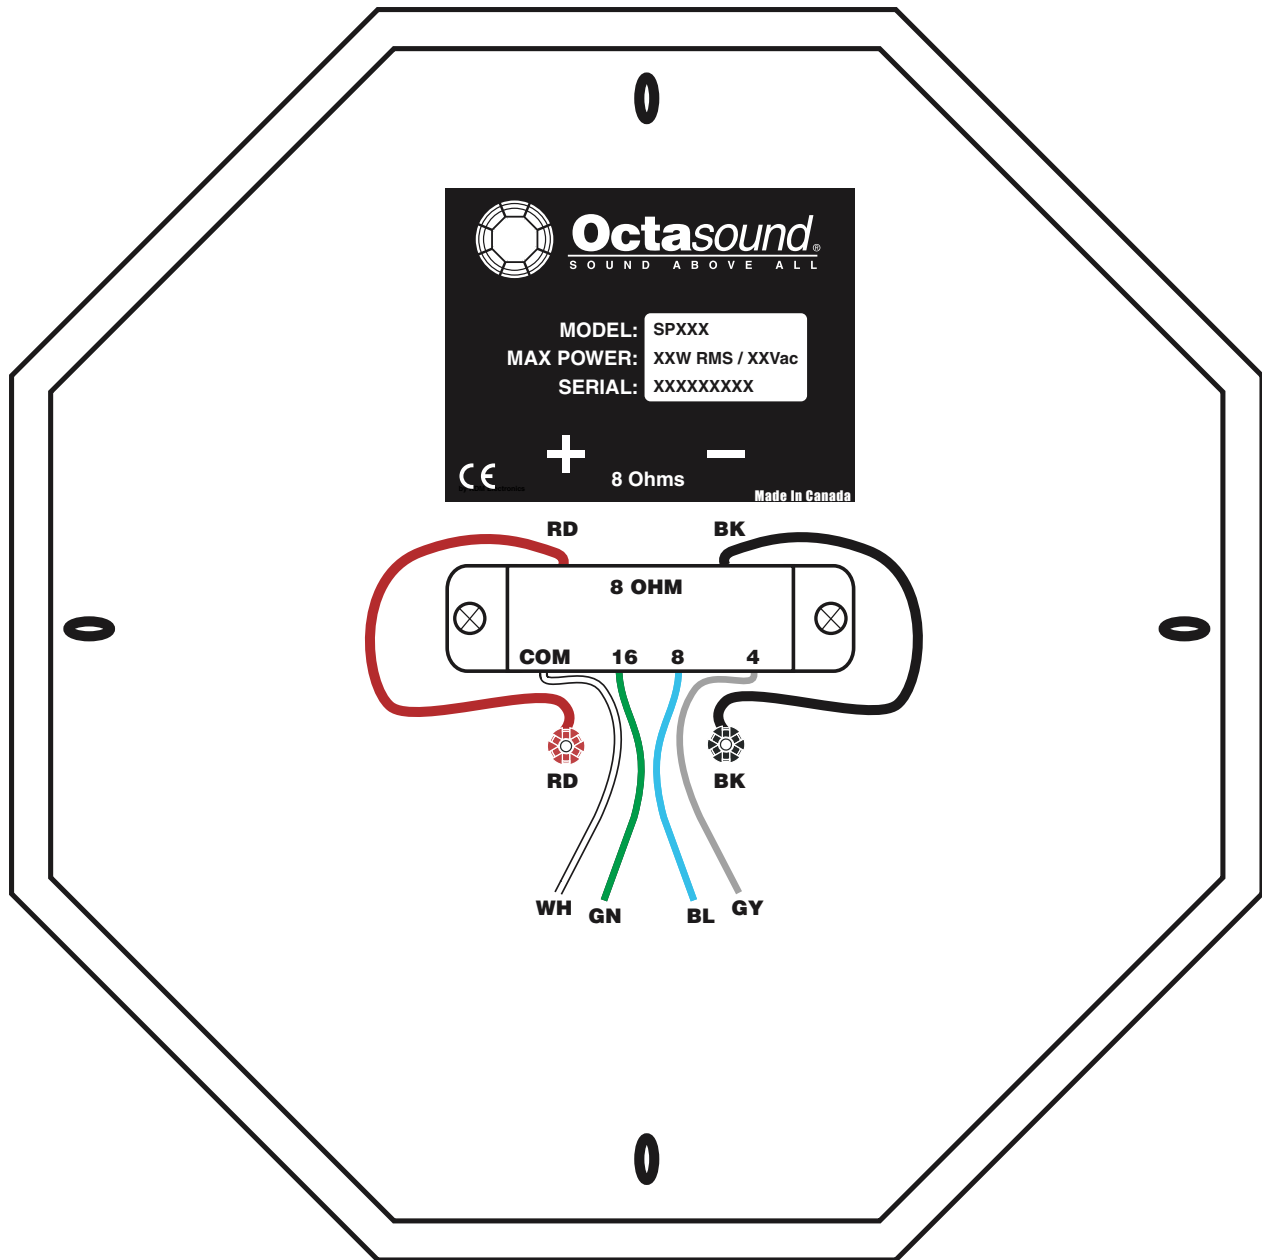

Octasound
SOUND ABOVE ALL

KDM Electronics Inc.
931 Progress Avenue, Unit #12
Toronto, Ontario
Canada, M1G 3V5

Tel: (416) 439-7158
Toll Free: 1-800-567-6282
Fax: (416) 439-7232
Web Site: www.octasound.com
E-Mail: kdm@octasound.com